


## DIFFRACTION GRATING SPECIFICATION SHEET

| Catalog no.         | 53-*-200H   | 3/24/2021     |        |  |  |
|---------------------|---|---------------|--------|--|--|
| Grating Description | 1201.6 g/mm plane blazed holographic reflection grating |               |        |  |  |
| Master no.          | 5233  |               |        |  |  |
| Maximum Ruled Area: |   | groove length | 102 mm |  |  |
|                     |   | ruled width:  | 102 mm |  |  |

| Efficiency Curve | spectral order:                                    | m = 1    | polarization(s): | S, P & Average |
|------------------|--|----------|------------------|----------------|
|                  | Coating:   | aluminum |                  |                |
| Remarks:         | Measured under near Littrow conditions on the AEC. |          |                  |                |

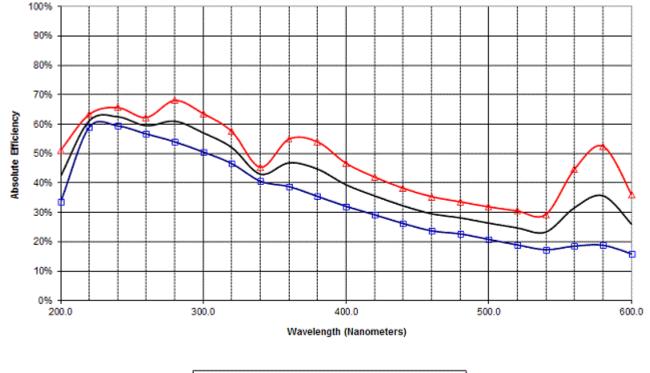

👍 S Plane 🗕 P Plane 🗕 S&P Plane Average

**Note:** The efficiency curve above is absolute and was measured in an in-plane near Littrow configuration (unless otherwise indicated). Efficiency curves are only representative: actual efficiency may vary significantly depending on use geometry and measurement technique. This efficiency curve is for master 5233; two masters with the same catalog number may have different efficiency curves. The uncertainty band on the data in the above efficiency curve(s) is +/- three percentage points.

 $\textcircled{\sc c}2021$  Newport Corporation All rights reserved.