




2 HOLES,
C'BORED FOR 4-40 (M3) A CLR,
.79 (20) SPACING

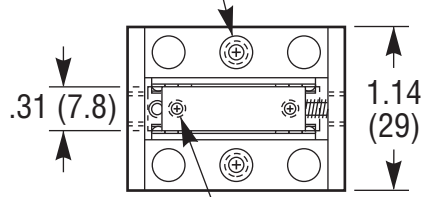

2 HOLES, 4-40 (M3),
.79 (20) SPACING

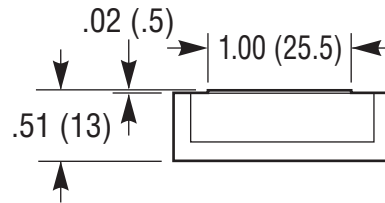

2 HOLES, 8-32 (M4)



M6 x 0.5 THD,
BOTH SIDES

3 HOLES,
8-32 (M4)
0.50 (12.5)
SPACING

